

Fearture

For handling a wide range of micro-sized parts and electronics chips. Compact design and versatility to handlea wide range of small parts. with high vibration frequency of 150 to 250Hz and small amplitude, this series is ideal for very small parts (5 mm or less) smooth delivery.

Order Code

L - H-20 - 1

- Voltage (1: 110V 2: 220V)
- Size
- Model




Dimension


Model	A	B	C	D	E	F	G	H	I	J	K	L
LH-20	97	108	77.5	32	73	30	43	55	17.6	17.4	M4	M6
LH-30	144	155	103	37	100	35	46	70	24	31	M4	M6

Unit mm

LH-20

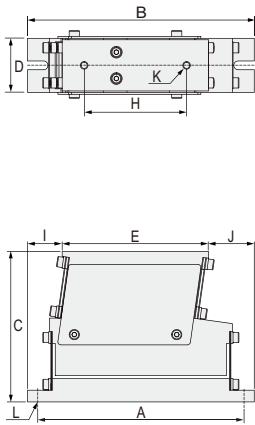

LH-30

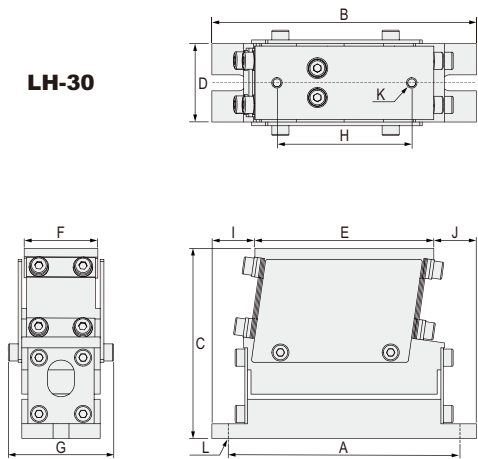

Specifications

Specifications Model	Rated Voltage (V)	Rated Current (A)	Vibration Frequency (Hz)	Vibration Cycles/Min	Mass (kg)	Applicable Control Unit	Applicable Chute
LH-20 ① ②	AC110/220	0.6/0.3	100~150	6000~9000	3.0	EC30-1DF/EC30-1SDF	100~250mm
LH-30 ① ②	AC110/220	0.6/0.3	100~150	6000~9000	3.8	EC30-1DF/EC30-1SDF	120~300mm