

Fearture

For handling a wide range of micro-sized parts and electronics chips. Compact design and versatility to handlea wide range of small parts. with high vibration frequency of 150 to 250Hz and small amplitude, this series is ideal for very small parts (5 mm or less) smooth delivery.

Order Code

L - K-45 - 1

- Voltage (1: 110V 2: 220V)
- Size
- Model




Dimension

| Model | A | B | C | D | E | F | G | H | I | J | K | L | M |
|-------|-----|-----|-----|-----|----|----|-----|----|----|----|-----|-----|----|
| LK-45 | 143 | 102 | 136 | 150 | 60 | 82 | 110 | 70 | 44 | M6 | Ø10 | 110 | 71 |
| LK-50 | 70 | 70 | 70 | 70 | 70 | 70 | 70 | 70 | 70 | M6 | Ø10 | 70 | 70 |

Unit mm

LK-45

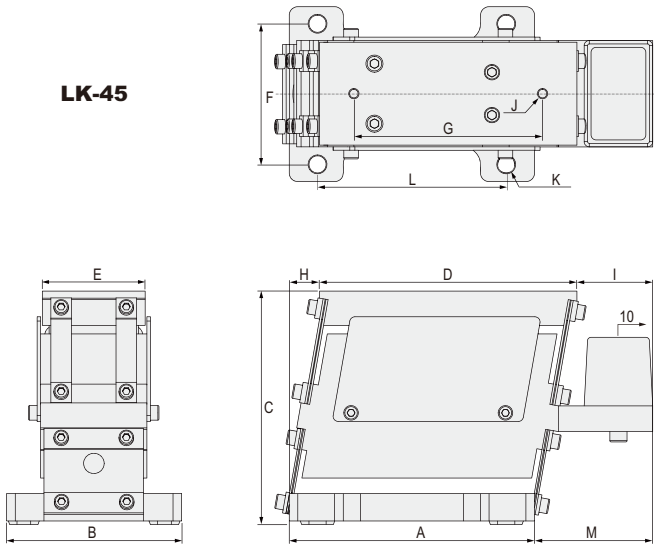

Specifications

| Specifications Model | Rated Voltage (V) | Rated Current (A) | Vibration Frequency (Hz) | Vibration Cycles/Min | Mass (kg) | Applicable Control Unit | Applicable Chute |
|----------------------|-------------------|-------------------|--------------------------|----------------------|-----------|-------------------------|------------------|
| LM-45 ① ② | AC110/220 | 0.6/0.3 | 100~150 | 6000~9000 | 3.0 | EC30-1DF/EC30-1SDF | 100~250mm |
| LM-50 ① ② | AC110/220 | 0.6/0.3 | 100~150 | 6000~9000 | 3.8 | EC30-1DF/EC30-1SDF | 120~30mm |