

# LM Series-Linear Drive Units

## Feature

For handling a wide range of micro-sized parts and electronics chips. Compact design and versatility to handle a wide range of small parts. with high vibration frequency of 150 to 250Hz and small amplitude, this series is ideal for very small parts (5 mm or less) smooth delivery.

## Order Code

**L** - **M-35** - **1**


- Voltage (1: 110V 2: 220V)
- Size
- Model




## Dimension

											Unit mm
Model	A	B	C	D	E	F	G	H	I	J	K
LM-35	140	32	106	110	70	126	30	24	36	M4	M6
LM-40	180	47	130	150	110	166	47	28	49	M4	M6

LM-35

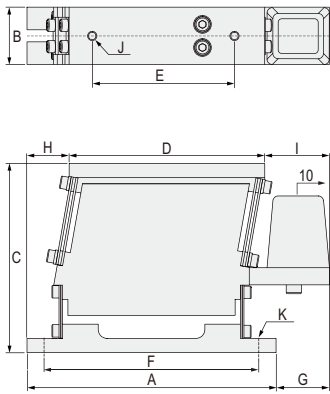

LM-40

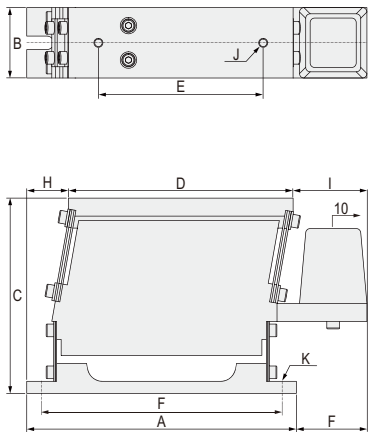

## Specifications

Specifications Model	Rated Voltage (V)	Rated Current (A)	Vibration Frequency (Hz)	Vibration Cycles/Min	Mass (kg)	Applicable Control Unit	Applicable Chute
LM-35 ① ②	AC110/220	0.6/0.3	50~120	3000~7200	3.0	EC30-1DF/EC30-1SDF	100~300mm
LM-40 ① ②	AC110/220	0.6/0.3	50~120	3000~7200	3.8	EC30-1DF/EC30-1SDF	200~400mm